

Dynapac CC3300C

Combi rollers



Technical data



Masses

Max. operating mass	8900 kg
Operating mass (incl. ROPS)	7900 kg
Module mass (front/rear)	4300 kg/3600 kg



Traction

Speed range (Dual/TC/AS)	0-12 km/h
Vertical oscillation	±7
Theor. gradeability	43 %



Compaction

Wheel load	900 (kg/wheel)
Centrifugal force (high/low amplitude)	82/72 kN
Nominal amplitude (high/low)	0.50/0.20 mm
Static linear load	25.0 kg/cm
Vibration frequency (high/low amplitude)	48/67 Hz
Water tank	750 l
Emulsion tank	78 l
Split drums	Yes



Compaction (CE)

Centrifugal force (high/low amplitude)	79 kN/55 kN
Vibration frequency (high/low amplitude)	48/62 Hz



Engine

Manufacturer/Model	Deutz TCD 3.6 HT T4f
Type	Water cooled turbo Diesel
Rated power, SAE J1995	55 kW (74 hp) @ 2200 rpm
Fuel tank capacity	130 l



Engine

Manufacturer/Model	Cummins QSB 3.3 IIIA/T3
Type	Water cooled turbo Diesel
Rated power, SAE J1995	74 kW (99 hp) @ 2200 rpm



Engine

Manufacturer/Model	Deutz TCD 3.6 HT StageV
Type	Water cooled turbo Diesel
Rated power, SAE J1995	55 kW (74 hp) @ 2200 rpm



Hydraulic system

Driving	Axial piston pump with variable displacement. Axial piston motors (4) with variable displacement.
Vibration	Axial piston pump with variable displacement. Axial piston motor with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in both drums.

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.



dynapac_cc3300c_en-20191106.155356.pdf 2019-11-06 15:53

Dynapac CC3300C

Combi rollers



Technical data

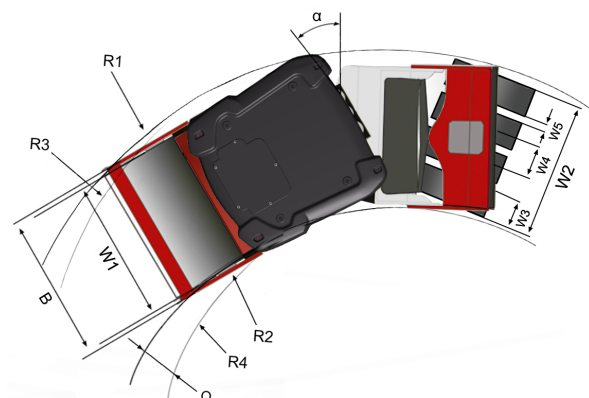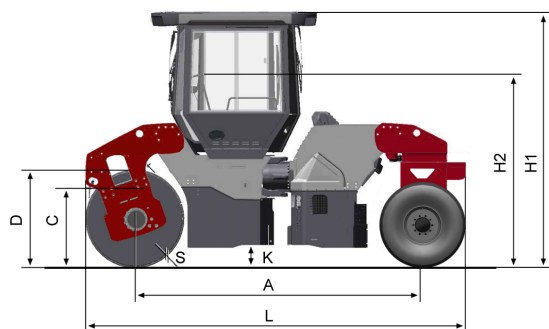

Dimensions	
A. Wheelbase	3340 mm
B. Width	1870 mm
C. Curb clearance	715 mm
D. Drum diameter	1150 mm
H1. Height, with ROPS/cab	2990 mm
K. Ground clearance	270 mm
L. Length	4490 mm
S. Drum shell thickness	17 mm
W1. Drum width	1730 mm
W2. Width, wheel module	1652 mm
W3. Width, tyre	285 mm
W4. Wheel track	467 mm
W5. Wheel spacing	165 mm
α . Steering angle	$\pm 32^\circ$

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_cc3300c_en-20191106.155356.pdf 2019-11-06 15:53