


Dynapac V3500V

Screeds



Technical data

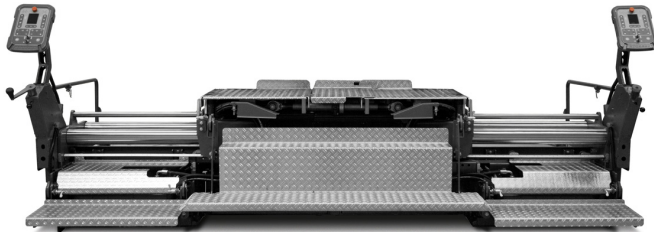

Masses

Mass (basic width)	1450 kg
Extension boxes (300 mm)	165 kg
Side shields, x2	190 kg



Dimensions

Basic width	1.75 m
Working width, minimum (with reducing shoe)	0.70 m
Working width, hydraulic extendable	3.50 m
Working width, max.	4.70 m
Bottom plates thickness	12 mm
Extension boxes	300 mm




Heating

Heating system	Propane (LPG)
Power, basic width	32.4 kW
Power, max width	46.8 kW
Control type	Zonal



Compaction

Compacting elements	Vibration
Crown profile	-2.5% up to 4.5%
Vibration frequency	3000 rpm

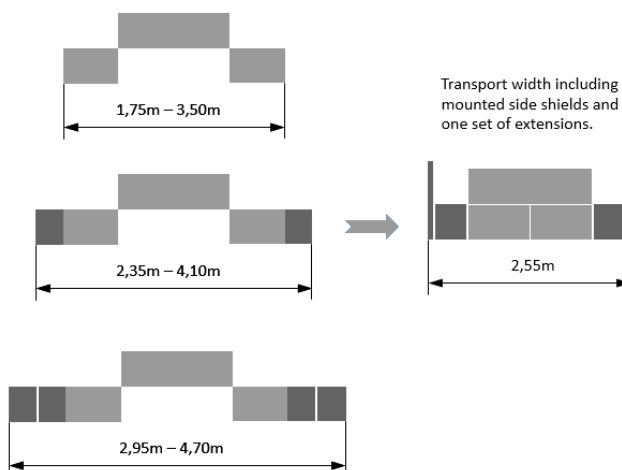

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.