


<b>Order-No. 553/7500 EU</b>
------------------------------

### Tandem-Machine transport trailer (loading area between axles) with sideways adjustable ramps, with EC type-approval/COC

Weights:	Total weight thereof supportive load maximum payload in standard model approx. empty weight approx.	7500 kg 500 kg 5650 kg 1850 kg
Measures:	Loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx. coupling height empty approx. total measures length x width approx.	4000 x 2030 mm 380 mm 660 mm 1800 mm max. ca. 1020 mm 6100 x 2550 mm
Ramps:	length approx. width approx. elevation approx.	2200 mm 500 mm 17° Grad
Tyres:	size	215/75 R 17,5      4-times

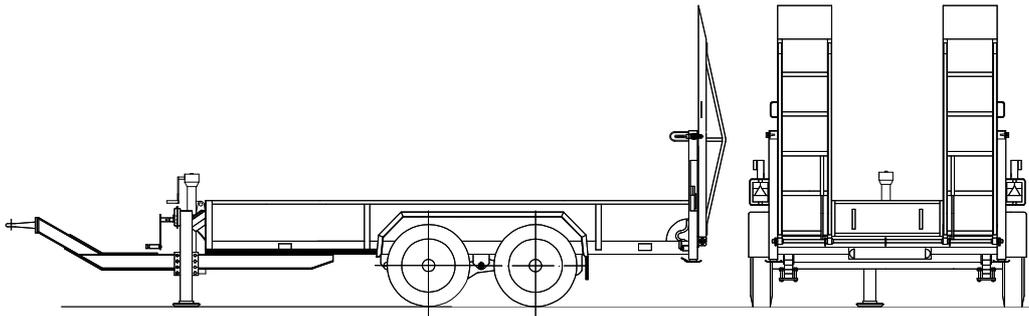

<b>Axles:</b>	Fast-running axles type GFA, with S-cam brakes, leaf springs and weight adjustment
<b>Brakes:</b>	Pressure air brake with release valve, ALB, testing sockets, connection hoses with mix-up safe couplings, 24V-antilock braking system (ABS), immobilisation brake
<b>Drawbar:</b>	Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
<b>Chassis frame:</b>	Self-supporting, buckling resistant frame, sturdily electro welded steel construction made of steel shades
<b>Upper body:</b>	Sidewalls made of steel, front- and sidewalls are strengthened, all steel parts are welded, mud guard made of edged steel plate with clearpass flap, solidly welded and accessible, plywood wall (made of 18mm strong plywood) between the ramps; lashing hooks in the corners with 4000daN, three pair of lashing rings with 2500daN embedded in the trailer bottom (approx. 1,25m in between); impregnated wooden bottom made of spruce wood with tongue and groove, 44mm strong, with side protection
<b>Support:</b>	Support winch in front with load and fast gear, two parking supports in the corner posts in the back assured by support legs
<b>Ramps:</b>	Sideways adjustable steel ramps with wooden facing and back beam; gas-filled shock absorber for lifting support, lockable with a quick release clamp
<b>Electric:</b>	Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached in a steel frame, LED-position-, track and side marker lights); 24 voltage, 7+7- or 15-pole depending on customer's request
<b>Varnishing:</b>	Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
<b>Accessories:</b>	Two brake shoes with handle, contour marking in accordance with ECE-R 104; EC type approval (COC), homologation documents

